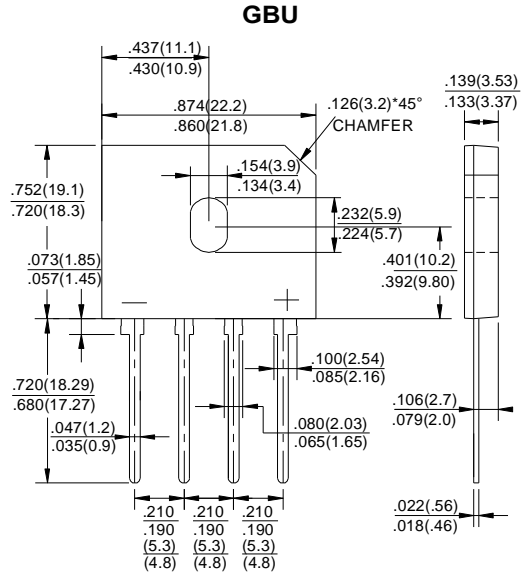


**GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER**
**FEATURES**

- ◆ Surge overload rating -220 amperes peak
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ Plastic material has U/L flammability classification 94V-0
- ◆ Mounting position: Any


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

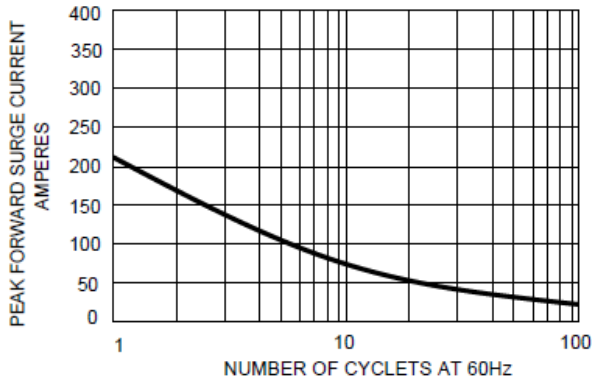
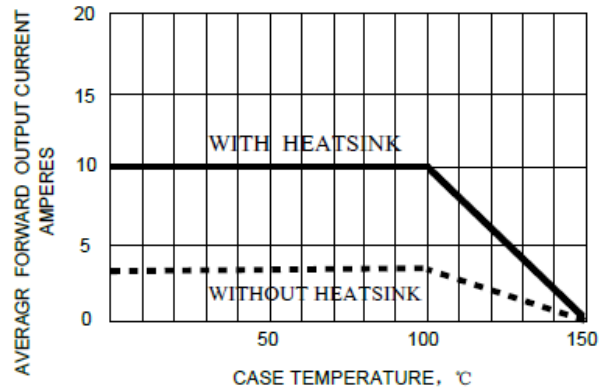
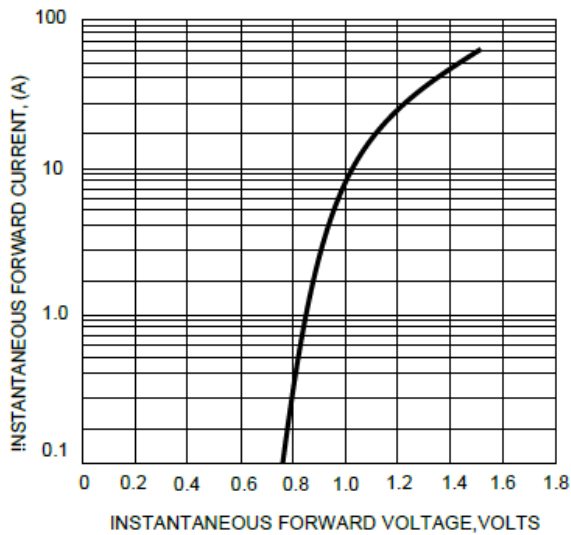
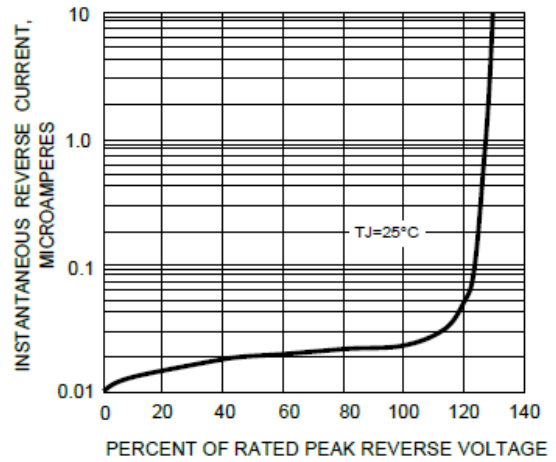
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	GBU 10A	GBU 10B	GBU 10D	GBU 10G	GBU 10J	GBU 10K	GBU 10M	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward (with heatsink NOTE 2) @ $T_c=100^\circ\text{C}$ Rectified Current ( without heatsink ° ) @ $T_c=100^\circ\text{C}$	$I_{(AV)}$					10.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$					220			Amps
Rating for Fusing ( $t < 8.3\text{ms}$ )	$I^2t$					200			$\text{A}^2\text{s}$
Maximum forward voltage at 10.0A DC	$V_F$					1.1			Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	$I_R$					10			$\mu\text{A}$
Typical Junction Capacitance (Note 1)	$C_J$					70			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$					2.2			$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$					-55 to +150			$^\circ\text{C}$
storage temperature range	$T_{STG}$					-55 to +150			$^\circ\text{C}$

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 75mm\*75mm\*1.6mm cu plate heatsink.

3. The typical data above is for reference only.

**RATINGS AND CHARACTERISTIC CURVES GBU10A THRU GBU10M**
**FIG.1-MAXIMUM FORWARD SURGE CURRENT**

**FIG.2- DERATING CURVE  
OUTPUT RECTIFIED CURRENT**

**FIG.3-TYPICAL FORWARD CHARACTERISTICS**

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**


The cruve graph is for reference only, can't be the basis for judgment!

## Disclaimer

DACO Semiconductor reserves the right to make modifications, enhancements, improvements, corrections, or other changes to this document and any product described herein without prior notice. For the most up-to-date version, please visit our website.

DACO Semiconductor makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does DACO Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any liability, including without limitation special, consequential or incidental damages.

Purchasers are responsible for its products and applications using DACO Semiconductor products, including compliance with all laws, regulations, and safety requirements or standards, regardless of any support or application information provided by DACO Semiconductor. "Typical" parameters that may be provided in DACO Semiconductor datasheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by the customer's technical experts.

DACO Semiconductor products are not designed, authorized, or warranted to be suitable for use in life support, life-critical or safety-critical systems, or equipment, nor in applications where failure or malfunction of DACO Semiconductor's product can reasonably be expected to result in personal injury, death or severe property or environmental damage. DACO Semiconductor accepts no liability for the inclusion and/or use of DACO Semiconductor's products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Purchasers who buy or use DACO Semiconductor products for any unintended or unauthorized applications are required to indemnify and absolve DACO Semiconductor, its suppliers, and distributors from any claims, costs, damages, expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that DACO Semiconductor was negligent regarding the design or manufacture of the part.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage and retrieval system, or otherwise, without the prior written permission of DACO Semiconductor Co., Ltd.